


HD Vari-Focal (12.5-50mm)

DV4x12.5SR4A-SA1L

4x Applicable camera (model) 1 2/3 1/2 1/3 1/4 For Security

HD 5 MP Day Night Applicable to 1/1.8

Vari-Focal Wide Angle Manual Iris C Mount Metal Mount ND Filter Aspherical Lens Large Aperture Ratio RoHS Compliant
VARI WIDE MANUAL C-mt METAL N D AT F1.6 RoHS

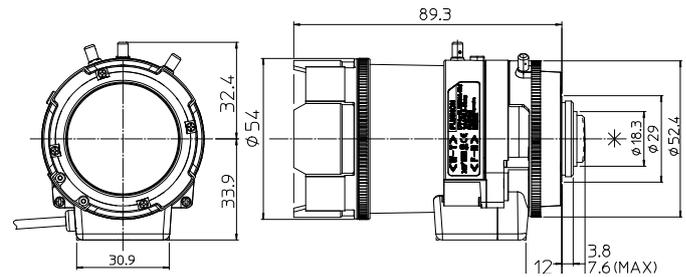

单位: mm

[Lens Image]



12.5mm



50mm

DV4x12.5SR4A-SA1L			
焦距范围 (mm)		12.5-50 (4x)	
光圈范围		F1.6 - T360(Equivalent to F360)	
操作方式	变焦	手动	
	聚焦	手动	
	光圈	DC自动	
视角 (H×V) 4:3	1/1.8"	广角端	35°54' × 24°37'
		长焦端	8°14' × 6°13'
	1/2"	广角端	29°32' × 22°7'
		长焦端	7°26' × 5°36'
视角 (H×V) 16:9	1/1.8"	广角端	35°52' × 20°6'
		长焦端	8°57' × 5°5'
	1/2"	广角端	32°12' × 18°3'
		长焦端	8°5' × 4°35'
最小物距 (From Front Of The Lens) (m)		∞ - 0.8	
最小物距下的 物体大小 (H×V) (mm) 4:3	1/1.8"	广角端	461 × 345
		长焦端	115 × 86
	1/2"	广角端	409 × 307
		长焦端	102 × 73
最小物距下的 物体大小 (H×V) (mm) 16:9	1/1.8"	广角端	496 × 279
		长焦端	124 × 70
	1/2"	广角端	446 × 251
		长焦端	111 × 63
后焦距 (空气换算长) (mm)		MIN.7.7	
出射光瞳 (从成像面) (mm)		-36	
过滤螺纹 (mm)		-	
接口		C	
重量 (g)		80	
光圈线圈电阻		激励线圈 190Ω 阻尼线圈 500Ω	
电流		23mA(Max.) at DC 4V	
备注		金属接圈 当切断电源时, 镜头光圈会自动关闭 DV4x12.5SR4A-SA1L: 自动光圈用电缆长度为(230mm)	