

HD Zoom (2000mm)

D60x16.7SR4DE-V21



60x Applicable camera (model) **1 2/3 1/1.8 1/2 1/3 1/4** **For Surveillance**



**VISIBLE
LIGHT
CUT**

Applicable to
1/1.8



Motor Drive

Telephoto
Long Focal
TELE



C Mount
C-mt

Metal Mour
METAL

Potential Meter


PRESET

ND Filter

ND

Extender
2x

RoHS
Compliant

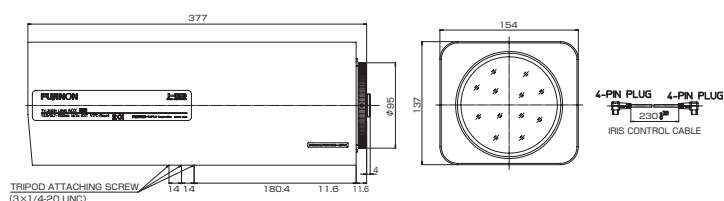

Unit : mm

D60x16.7SR4DE-V21				
Focal Length (mm)		1x		16.7 - 1000
		2x		33.4 - 2000
Iris Range		1x		F3.5 - F16
		2x		F7.0 - F32
Filter		ND (1/8, 1/64), Visible Light Cut		
Operation		Zoom		Motor Drive
		Focus		Motor Drive
		Iris		Auto(DC type) or Remote
AF		N/A		
Optical Anti-Vibration		N/A		
Angle of View (H x V) (4:3) (mm)	1/1.8"	1x	WIDE	23°4' x 17°40'
			TELE	0°25' x 0°19'
		2x	WIDE	11°45' x 8°53'
			TELE	0°12' x 0°9'
	1/2"	1x	WIDE	20°51' x 15°54'
			TELE	0°22' x 0°17'
		2x	WIDE	10°34' x 7°58'
			TELE	0°11' x 0°8'
Angle of View (H x V) (16:9) (mm)	1/1.8"	1x	WIDE	24°53' x 14°34'
			TELE	0°27' x 0°15'
		2x	WIDE	12°45' x 7°17'
			TELE	0°14' x 0°8'
	1/2"	1x	WIDE	22°33' x 13°5'
			TELE	0°24' x 0°14'
		2x	WIDE	11°28' x 6°32'
			TELE	0°12' x 0°7'
Focus Range (From the Lens Front) (m)		∞ - 5		
Object Dimensions at M.O.D.(H x V) (4:3) (mm)	1/1.8"	1x	WIDE	1972 x 1503
			TELE	35 x 27
		2x	WIDE	995 x 27
			TELE	18 x 13
	1/2"	1x	WIDE	1780 x 1351
			TELE	32 x 24
		2x	WIDE	895 x 675
			TELE	16 x 12
Object Dimensions at M.O.D.(H x V) (16:9) (mm)	1/1.8"	1x	WIDE	2133 x 1236
			TELE	38 x 22
		2x	WIDE	1081 x 616
			TELE	19 x 11
	1/2"	1x	WIDE	1929 x 1110
			TELE	34 x 20
		2x	WIDE	972 x 553
			TELE	17 x 10
Back Focal Distance (in air) (mm)		24.92		
Exit Pupil Position (From Image Plane) (mm)		(1x) -448.80 (2x) -85.23		
Filter Thread (mm)		M112 x 0.75		
Mount		C		
Extender		2x		
Mass (kg)		6.4		
Standard Accessories		IRIS CONTROL CABLE		
Remarks				

