


HD Vari-Focal (8-80mm)

DV10x8SR4A-SA1

10x Applicable camera (model) 1 2/3 1/2 1/3 1/4 For Security



* Photograph is a similar model.

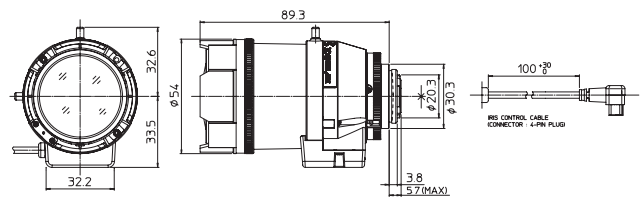


Unit : mm

DV10x8SR4A-SA1

焦距范围 (mm)			8 - 80 (10x)
光圈范围			F1.6 - T360(Equivalent to F360)
操作方式	变焦		手动
	聚焦		手动
	光圈		DC自动
视 角 (H×V) 4 : 3	1/2"	广角端	44°33' × 34°58'
		长焦端	4°42' × 3°32'
	1/3"	广角端	34°58' × 26°35'
		长焦端	3°32' × 2°39'
	1/4"	广角端	22°40' × 17°06'
		长焦端	2°22' × 1°47'
视 角 (H×V) 16 : 9	1/2"	广角端	49°39' × 29°10'
		长焦端	5°07' × 2°53'
	1/3"	广角端	38°16' × 22°05'
		长焦端	3°50' × 2°09'
	1/4"	广角端	24°42' × 14°03'
		长焦端	2°35' × 1°27'
最小物距 (From Front Of The Lens) (m)			∞ - 1.5
最小物距下的 物体大小 (H×V) (mm) 4 : 3	1/2"	广角端	1285 × 964
		长焦端	141 × 105
	1/3"	广角端	964 × 723
		长焦端	105 × 76
	1/4"	广角端	613 × 460
		长焦端	71 × 53
最小物距下的 物体大小 (H×V) (mm) 16 : 9	1/2"	广角端	1417 × 797
		长焦端	153 × 86
	1/3"	广角端	1063 × 598
		长焦端	115 × 65
	1/4"	广角端	670 × 377
		长焦端	77 × 43
后焦距 (空气换算长) (mm)			18.19
出射光瞳 (从成像面) (mm)			1705
过滤螺纹 (mm)			-
接口			C
重量 (g)			180
光圈线圈电阻			激励线圈 190Ω 阻尼线圈 1,150Ω
电流			23mA(Max.) at DC 4V

Wiring

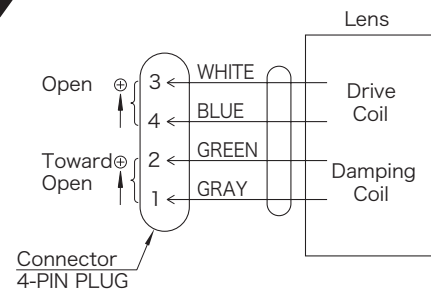

[Lens Image]



8mm



80mm

备注

金属接圈
当切断电源时, 镜头光圈会自动关闭
DV10x8SR4A-SA1L : 自动光圈用电缆长度为(230mm)