

FH60x20R4D-V21

60x Applicable camera (model) 1 2/3 1/1.8 1/2 1/3 1/4 For Surveillance

HD
2MP

Day
Night

VISIBLE
LIGHT
CUT

Applicable to
2/3

FOG

Zoom
ZOOM

Motor Drive
MOTOR DRIVE

Telephoto
Long Focal
TELE

DC Auto Iris
D C


C Mount
C-mt

Metal Mount
METAL

Potentiometer
PRESET

ND Filter
N D

RoHS
Compliant
RoHS

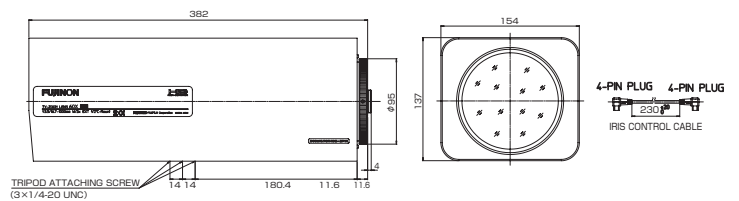

Unit : mm

FH60x20R4D-V21				
焦距范围 (mm)		1×		20 - 1200
光圈范围		1×		F4.2 - F19.2
滤镜				透雾
操作方式		变倍		电动
		聚焦		电动
		光圈		DC自动/或遥控
AF				N/A
Optical Anti-Vibration				N/A
视 角 (H × V) (4:3) (mm)	2/3 "	1×	广角端	23°03' × 17°40'
			长焦端	0°25' × 0°19'
			广角端	
			长焦端	
	1/1.8 "	1×	广角端	19°18' × 14°28'
			长焦端	0°20' × 0°15'
		广角端		
		长焦端		
视 角 (H × V) (16:9) (mm)	2/3 "	1×	广角端	24°52' × 14°34'
			长焦端	0°27' × 0°15'
			广角端	
			长焦端	
	1/1.8 "	1×	广角端	20°36' × 11°54'
			长焦端	0°22' × 0°12'
			广角端	
			长焦端	
最小物距 From Front Of The Lens (m)			∞ - 5	
最小物距下的 物体大小 (H×V) (4:3) (mm)	2/3 "	1×	广角端	1971 × 1504
			长焦端	35 × 27
			广角端	
			长焦端	
	1/1.8 "	1×	广角端	1622 × 1229
			长焦端	29 × 22
			广角端	
			长焦端	
最小物距下的 物体大小 (H×V) (mm) (16:9) (mm)	2/3 "	1×	广角端	2131 × 1237
			长焦端	38 × 22
			广角端	
			长焦端	
	1/1.8 "	1×	广角端	1758 × 1009
			长焦端	31 × 18
			广角端	
			长焦端	
后焦距 (空气换算长) (mm)			24.92	
出射光瞳 (从成像面) (mm)			(1x) -448.80 (2x) -85.23	
过滤螺蚊 (mm)			M112 × 0.75	
接口			C	
扩展				
重量 (kg)			6.6	
标准配件			光圈控制电缆 15针连接接头 5针连接接头	
备注				

