

HD Vari-Focal (2.8-8mm)

YV2.8x2.8SA-SA2



2.8x

Applicable camera (model)

1

2/3

1/2

1/3

1/4

For Security



Vari-Focal
VARI

Wide Angle
WIDE

DC Auto Iris
D C

CS Mount
CS-mt

Metal Mount
METAL


ND Filter
N D

Long Cable
230

Aspherical Lens
AT

Large Aperture Ratio
F1.2

RoHS Compliant
RoHS

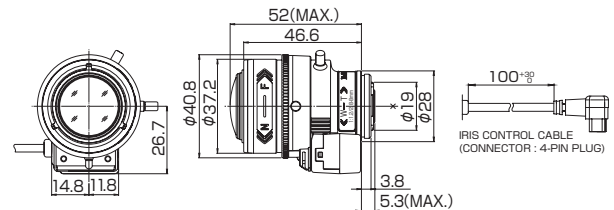


Unit : mm

YV2.8x2.8SA-SA2

焦距范围 (mm)			2.8 - 8 (2.8x)
光圈范围			F1.2 - T360(Equivalent to F360)
操作方式	变焦		手动
	聚焦		手动
	光圈		DC自动
视 角 (H×V) 4:3	1/3"	广角端	100°00' × 73°45'
		长焦端	35°03' × 26°18'
	1/4"	广角端	73°45' × 54°49'
		长焦端	26°18' × 19°44'
视 角 (H×V) 16:9	1/3"	广角端	109°50' × 59°51'
		长焦端	38°11' × 21°29'
	1/4"	广角端	80°39' × 44°38'
		长焦端	28°39' × 16°07'
最小物距 (From Front Of The Lens) (m)			∞ - 0.3
最小物距下的 物体大小 (H×V) (mm) 4:3	1/3"	广角端	744 × 468
		长焦端	197 × 146
	1/4"	广角端	468 × 323
		长焦端	146 × 108
最小物距下的 物体大小 (H×V) (mm) 16:9	1/3"	广角端	890 × 359
		长焦端	216 × 118
	1/4"	广角端	530 × 256
		长焦端	159 × 88
后焦距 (空气换算长) (mm)			7.70
出射光瞳 (从成像面) (mm)			314
过滤螺纹 (mm)			-
接口			CS
重量 (g)			50
光圈线圈电阻			激励线圈 190Ω 阻尼线圈 500Ω
电流			23mA(Max.) at DC 4V
备注			金属接圈 当切断电源时, 镜头光圈会自动关闭 YV2.8×2.8SA-SA2L : 自动光圈用电缆长度为(230mm)

Wiring

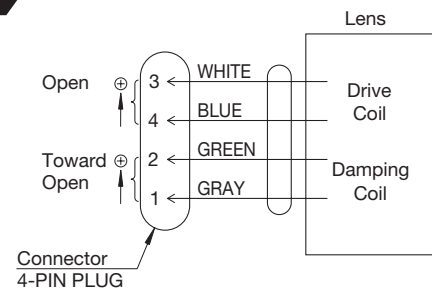

[Lens Image]

2.8mm



8mm

