

HD Vari-Focal (15-50mm)

YV3.3x15SA-SA2

3.3x

Applicable camera (model)

1

2/3

1/2

1/3

1/4

For Security

HD
3MP

Vari-Focal

Telephoto Long Focal

DC Auto Iris

CS Mount

Metal Mount

ND Filter

Long Cable

Aspherical Lens

Large Aperture Ratio

RoHS Compliant

VARI

TELE

DC

CS-mt

METAL


ND

230

AT

F1.5

RoHS

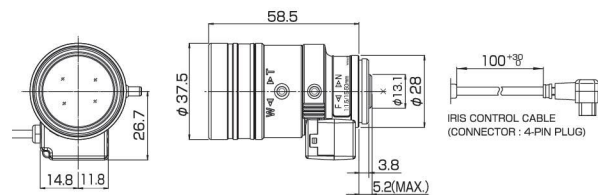


Unit : mm

YV3.3x15SA-SA2

焦距范围 (mm)			15 - 50 (3.3x)
光圈范围			F1.5 - T360(Equivalent to F360)
操作方式			手动
			手动
			DC自动
视 角 (H×V) 4 : 3	1/3"	广角端	18°08' × 13°34'
		长焦端	5°35' × 4°12'
	1/4"	广角端	13°34' × 10°10'
		长焦端	4°12' × 3°10'
视 角 (H×V) 16 : 9	1/3"	广角端	19°46' × 11°04'
		长焦端	6°04' × 3°26'
	1/4"	广角端	14°47' × 8°18'
		长焦端	4°34' × 2°35'
最小物距 (From Front Of The Lens) (m)			∞ - 0.8
最小物距下的 物体大小 (H×V) (mm) 4 : 3	1/3"	广角端	271 × 202
		长焦端	87 × 66
	1/4"	广角端	202 × 151
		长焦端	66 × 49
最小物距下的 物体大小 (H×V) (mm) 16 : 9	1/3"	广角端	296 × 165
		长焦端	95 × 54
	1/4"	广角端	220 × 123
		长焦端	72 × 40
后焦距 (空气换算长) (mm)			MIN.7.7
出射光瞳 (从成像面) (mm)			-36
过滤螺纹 (mm)			-
接口			CS
重量 (g)			60
光圈线圈电阻			激励线圈 190Ω 阻尼线圈 500Ω
电流			23mA(Max.) at DC 4V
备注			金属接圈 当切断电源时, 镜头光圈会自动关闭 自动光圈用电缆长度为(230mm)

Wiring

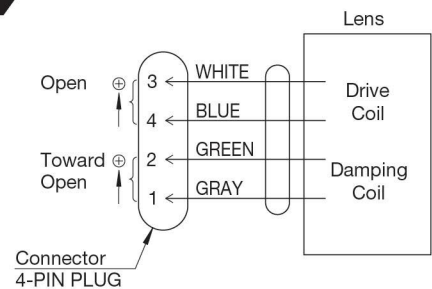

[Lens Image]

