

HD Vari-Focal (2.8-8mm)

YV2.8x2.8SR4A-SA2

2.8x Applicable camera (model) 1 2/3 1/2 1/2.7 1/3 1/4 For Security

HD
3MP

Day
Night

Applicable to
1/2.7

Vari-Focal
VARI

Wide Angle
WIDE

DC Auto Iris
D C

CS Mount
CS-mt

Metal Mount
METAL


ND Filter
N D

Long Cable
230

Aspherical Lens
AT

Large Aperture Ratio
F1.3

RoHS Compliant
RoHS

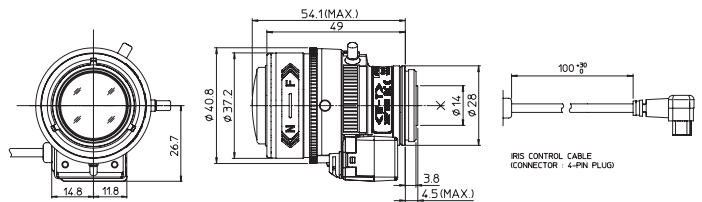


Unit : mm

YV2.8x2.8SR4A-SA2

焦距范围 (mm)		2.8 - 8 (2.8x)		
光圈范围		F1.3 - T360		
操作方式	变焦		手动	
	聚焦		手动	
	光圈		DC自动	
视 角 (H×V) 4 : 3	1/2.7"	广角端	112°33' × 81°21'	
		长焦端	38°53' × 29°08'	
	1/3"	广角端	100°34' × 73°22'	
		长焦端	35°16' × 26°26'	
	1/4"	广角端	73°22' × 54°18'	
		长焦端	26°26' × 19°49'	
视 角 (H×V) 16 : 9	1/2.7"	广角端	125°6' × 65°35'	
		长焦端	42°23' × 23°47'	
	1/3"	广角端	111°8' × 59°19'	
		长焦端	38°27' × 21°35'	
	1/4"	广角端	80°23' × 44°13'	
		长焦端	28°47' × 16°13'	
	最小物距 (From Front Of The Lens) (m)		∞ - 0.3	
	最小物距下的 物体大小 (H×V) (mm) 4 : 3	1/2.7"	广角端	917 × 525
长焦端			226 × 166	
1/3"		广角端	737 × 455	
		长焦端	204 × 151	
1/4"		广角端	456 × 314	
		长焦端	151 × 112	
最小物距下的 物体大小 (H×V) (mm) 16 : 9	1/2.7"	广角端	1181 × 394	
		长焦端	248 × 135	
	1/3"	广角端	895 × 348	
		长焦端	224 × 122	
	1/4"	广角端	517 × 249	
		长焦端	165 × 91	
后焦距 (空气换算长) (mm)		8.49		
出射光瞳 (从成像面) (mm)		217		
过滤螺纹 (mm)		-		
接口		CS		
重量 (g)		60		
光圈线圈电阻		激励线圈 190Ω 阻尼线圈 500Ω		
电流		23mA(Max.) at DC 4V		

Wiring

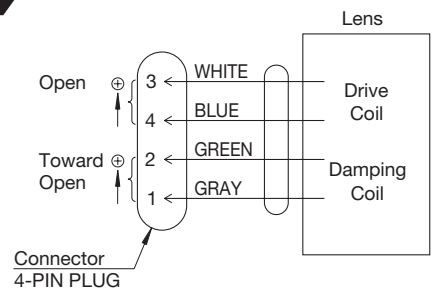

[Lens Image]



备注
金属接圈
当切断电源时, 镜头光圈会自动关闭
YV2.8x2.8SR4A-SA2L : 自动光圈用电缆长度为(230mm)