

HD Zoom (1700mm)

HD60x14.2R4DE-V21

60x Applicable camera (model) 1 2/3 1/1.8 1/2 1/3 1/4 For Surveillance

HD
2MP

Day
Night

VISIBLE
LIGHT
CUT

Applicable to
1/1.8

FOG

Zoom
ZOOM

Motor Drive
MOTOR DRIVE

Telephoto Long Focal
TELE

DC Auto Iris
D C

C Mount
C-mt


Metal Mount
METAL

Potentiometer
PRESET

ND Filter
N D

Extender
2 X

RoHS Compliant
RoHS

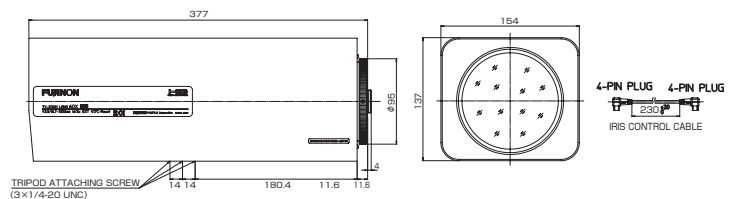

Unit : mm

HD60x14.2R4DE-V21

焦距范围 (mm)	1x	14.2 - 850
	2x	28.4 - 1700
光圈范围	1x	F3.5 - F16
	2x	F7.0 - F32
滤镜	ND (1/8, 1/64), Visible Light Cut	
操作方式	变倍	电动
	聚焦	电动
	光圈	DC自动或遥控
AF	N/A	
Optical Anti-Vibration	N/A	
视 角 (H x V) (4:3) (mm)	1/1.8"	1x 广角端 28°27' x 21°32'
		1x 长焦端 0°29' x 0°24'
		2x 广角端 14°04' x 10°54'
		2x 长焦端 0°15' x 0°12'
	1/2"	1x 广角端 25°24' x 19°11'
		1x 长焦端 0°26' x 0°19'
视 角 (H x V) (16:9) (mm)	1/1.8"	2x 广角端 12°51' x 9°40'
		2x 长焦端 0°13' x 0°10'
		1x 广角端 30°34' x 17°27'
		1x 长焦端 0°27' x 0°18'
	1/2"	2x 广角端 15°34' x 8°47'
		2x 长焦端 0°16' x 0°9'
最小物距 (HxV) (4:3) (mm)	1/1.8"	1x 广角端 27°35' x 15°43'
		1x 长焦端 0°28' x 0°16'
		2x 广角端 14°03' x 7°54'
		2x 长焦端 0°14' x 0°8'
	1/2"	1x 广角端 1780 x 1351
		1x 长焦端 32 x 24
最小物距下的 物体大小 (HxV) (mm)	1/1.8"	2x 广角端 895 x 675
		2x 长焦端 16 x 12
	1/2"	1x 广角端 2133 x 1236
		1x 长焦端 38 x 22
	1/1.8"	2x 广角端 1081 x 616
		2x 长焦端 19 x 11
最小物距下的 物体大小 (HxV) (mm) (16:9) (mm)	1/1.8"	1x 广角端 1929 x 1110
		1x 长焦端 34 x 20
	1/2"	2x 广角端 972 x 553
		2x 长焦端 17 x 10
	1/1.8"	1x 广角端 24.92
		1x 长焦端 (1x) -448.80 (2x) -85.23
后焦距 (空气换算长) (mm)	24.92	
出射光瞳 (从成像面) (mm)	(1x) -448.80 (2x) -85.23	
过滤螺纹 (mm)	M112 x 0.75	
接口	C	
扩展	2x	
重量 (kg)	7.1	
标准配件	光圈控制电缆 15针连接接头 5针连接接头	
备注		

Wiring

